

PROBONDdigital®



PROBOND Digital® delivers superb print results with increased colour brightness and intensity. The receptive coating promotes maximum ink adhesion without scratching or marking images.



easy-peel clear
protective film



optimised for
ink reception



uniform,
flat surface



superior quality
and performance



versatile and
easily formable



vertical panel,
circular or jig-saw



superior routing
performance



extended
durability

Applications

- ✓ Direct UV printing
- ✓ Sign making
- ✓ Display signage
- ✓ Promotional print
- ✓ Exhibition boards
- ✓ Internal and external applications

PROBOND Digital® is ideal for all digital direct print using UV and flatbed printers, for internal and external applications such as long-term branding and general signage.

PROBOND Digital® is a 3mm panel designed for ultimate results with all direct print UV digital inkjet machines. This optimum coated panel is designed to ensure maximum ink adhesion without images scratching or marking easily and increases intensity and brightness of colours.

PROBOND Digital® comes with a clear "easy-peel" protective liner which ensures no ghosting or adhesive marks show through after printing.

It has 0.21mm aluminium skins with premium grade aluminium making it also suitable for folding.

Aluminium Skin


0.21mm Premium Grade aluminium providing superb flatness and rigidity.

Adhesive

Henkel™ Hot Melt Adhesive for superior adhesion.

Core

Pure LDPE core material.

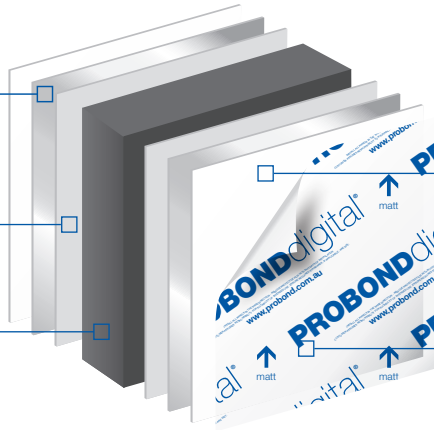

Paint Finish

One side is coated with a FLPE Ultra White Print Receptive coating designed specifically for direct UV digital inkjet printing, ensuring excellent ink adhesion and increased colour brightness and intensity.

Clear Protective Film

An easy-peel protective liner protects the print-receptive face and keeps panel in premium condition. Special adhesive on the film ensures that no adhesive marks show through on printed graphics.



PROBONDdigital®

AVAILABILITIES

Panel Thickness (mm)	3mm
Aluminium Thickness (mm)	0.21mm
Weight	4.25kg/m ²
Standard Sizes (mm)	2440mm X 1220mm, 3660mm X 1220mm 3050mm X 1500mm, 4000mm X 1500mm

