

PROBOND[®]ultraFR[®]



PROBOND UltraFR[®] is ideal for caravans, recreational vehicles and other mobile applications where fire retardant* properties are desired. The unique mineral filled core resists burning under intense heat.



fire
resistant



Group1 BCA
classification



easy-peel clear
protective film



superior quality
and performance



versatile and
easily formable



vertical panel,
circular or jig-saw



superior routing
performance



extended
durability


Applications

- ✓ Recreational Vehicle Cladding
- ✓ Trailer Cladding
- ✓ Truck Bodies
- ✓ Food Transport Vehicles

With upgraded components, PROBOND UltraFR® offers extended durability and is ideal for use across transport and recreational vehicle applications

PROBOND UltraFR® is a superior performance aluminium composite panel for mobile situations. It is suitable for high quality long-lasting cladding applications where thermal and fire resistant properties are desired.

The mineral core is designed to resist burning under extreme fire conditions and has a PPG FEVE Coating for extended outdoor durability designed to withstand the harsh Australian UV conditions. It is the highest standard of panel for mobile cladding applications.

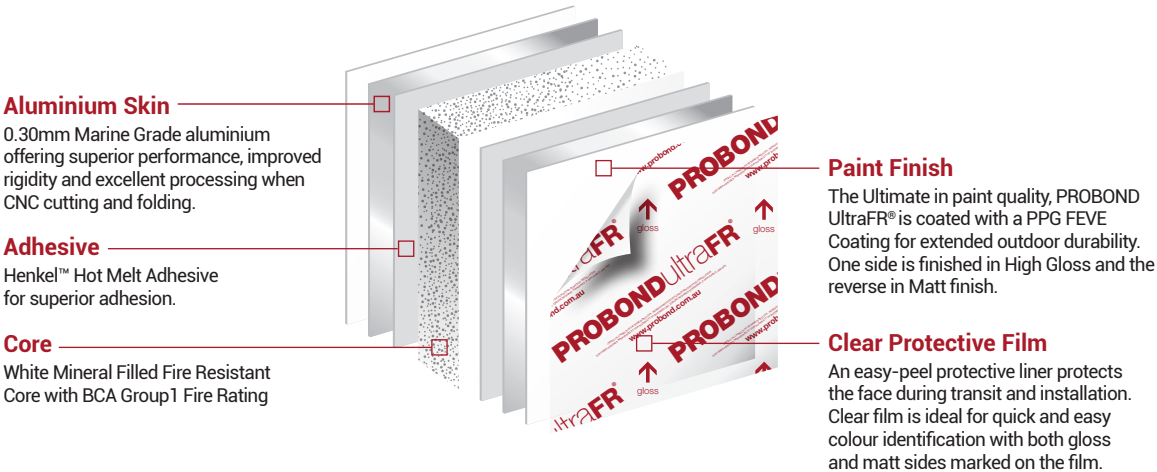

PROBONDultraFR®

Fire Rating



AVAILABILITIES	
Panel Thickness (mm)	3mm
Aluminium Thickness (mm)	0.30mm
Weight	5.0kg/m ²
Standard Sizes (mm)	2440mm X 1500mm, 3050mm X 1500mm, 4000mm X 1500mm

