

PROBOND[®]ultra



The ultimate panel for long-lasting mobile cladding requirements. PROBOND Ultra[®] is the ideal selection for caravans and recreational vehicle applications.



easy-peel clear
protective film



lightweight
yet rigid



uniform,
flat surface



superior quality
and performance



versatile and
easily formable



vertical panel,
circular or jig-saw



superior routing
performance



extended
durability

Applications

- ✓ Recreational Vehicle Cladding
- ✓ Trailer Cladding
- ✓ Truck Bodies
- ✓ Food Transport Vehicles

Available in a wide range of colours and finishes, PROBOND Ultra® is dual-sided sheet delivering superior performance when fabricated, folded and formed.

PROBOND Ultra® is the ultimate aluminium composite panel in mobile situations and is suitable for high quality long-lasting cladding applications. This unique panel has a PPG FEVE Coating for extended outdoor durability designed to withstand the harsh Australian UV conditions. The extensive colour range ensures that a creative selection is available to meet personalised colour requirements, limited only by imagination. PROBOND Ultra® is the first choice for high quality long-term use. With superior quality 0.30mm Marine Grade aluminium it is the perfect panel for 90 degree folding and other formwork.

* Some colours not suitable for horizontal applications.

Aluminium Skin


0.30mm Marine Grade aluminium offering superior performance, improved rigidity and excellent processing when CNC cutting and folding.

Adhesive

Henkel™ Hot Melt Adhesive for superior adhesion.

Core

Pure LDPE core material.

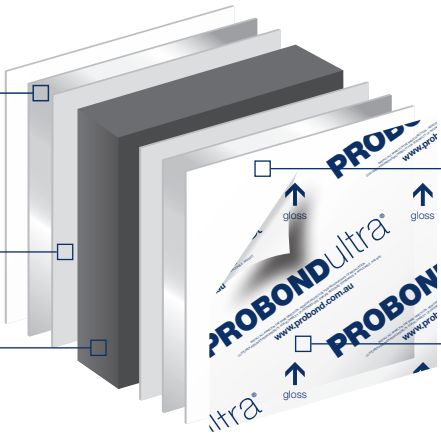

Paint Finish

The Ultimate in paint quality, PROBOND Ultra® is coated with a PPG FEVE Coating for extended outdoor durability. One side is finished in High Gloss and the reverse in Matt finish.

Clear Protective Film

An easy-peel protective liner protects the face during transit and installation. Clear film is ideal for quick and easy colour identification with both gloss and matt sides marked on the film.



PROBONDultra®

AVAILABILITIES

| | |
|---------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Panel Thickness (mm) | 3mm |
| Aluminium Thickness (mm) | 0.30mm |
| Weight | 4.50kg/m ² |
| Standard Sizes (mm) | 2440mm X 1220mm, 3660mm X 1220mm 2440mm X 1500mm, 3050mm X 1500mm, 3660mm X 1500mm, 4000mm X 1500mm 4000mm X 2000mm Refer to colour guide for availabilities, all colours may not be available in all listed sizes |

