

 Signage Solution

 Display Solution

# PROBOND<sup>®</sup>ultraFR<sup>®</sup>



PROBOND UltraFR<sup>®</sup> is one of the only Fire Retardant Signage Grade Panels in the world and is suitable for signage for Type A and Type B constructions where a Group 1 Fire Rating is required.\*  
The unique mineral filled core resists burning under intense heat.



fire  
resistant



Group 1 BCA  
classification



easy-peel clear  
protective film



superior quality  
and performance



versatile and  
easily formable



vertical panel,  
circular or jig-saw



superior routing  
performance



extended  
durability

## Applications


- ✓ General Signage
- ✓ Fascia
- ✓ Formwork
- ✓ Pylon Signs
- ✓ Exhibition Stands & Displays
- ✓ Internal Fitouts

\* This product is not suitable for use where non-combustible panel is required

With upgraded components, PROBOND UltraFR® has been developed to satisfy requirements where Building Code Fire Rating qualities are required.

PROBOND UltraFR® is one of the only Fire Retardant Signage Grade panels in the world and is designed for where a fire retardant panel with a Group1 BCA Classification is required for your signage application.

The mineral core is designed to resist burning under extreme fire conditions and has a PPG FEVE Coating for extended outdoor durability designed to withstand the harsh Australian UV conditions. It is the highest standard of panel for all signage applications.

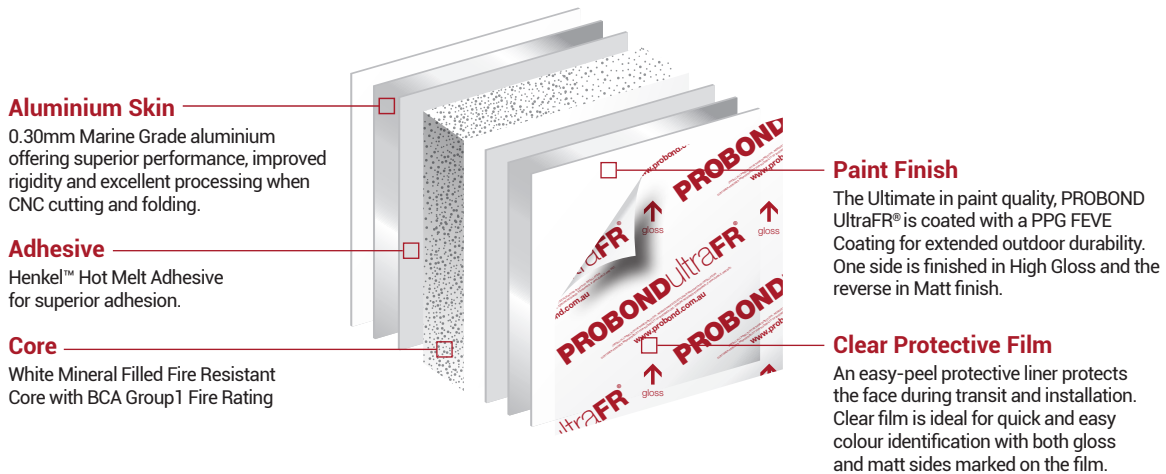

Fire Rating



# PROBOND UltraFR®

## AVAILABILITIES

Panel Thickness (mm)	3mm
Aluminium Thickness (mm)	0.30mm
Weight	5.0kg/m <sup>2</sup>
Standard Sizes (mm)	2440mm X 1500mm, 3050mm X 1500mm, 4000mm X 1500mm



PROBOND ARCHITECTURAL  
T 1300 72 73 74  
[www.probond.com.au](http://www.probond.com.au)